


BCC M415-0000-1A-008-VX8434-150
Ordering code: BCC06T7

Connector

M12x1, 15m, PVC
PNP
Complementary (NO/NC)

BALLUFF
sensors worldwide

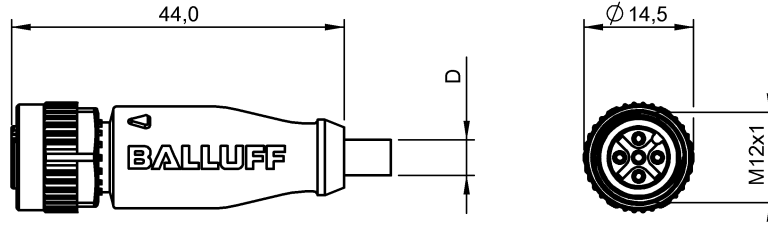

Characteristic data

Special properties	Drag chain compatible
Power-on indicator	LED green
Degree of protection as per IEC 60529	IP68
Cable jacket colour	gray
Function indicator (PIN 2)	No
Function indicator (PIN 4)	LED yellow

Electrical data

Operating voltage UB max. DC	30 V
------------------------------	------

Mechanical data

Number of conductors	4
Cable length	15 m
Connector type	M12x1
Conductor cross-section	0.34 mm ²
Ambient temp. min. (drag chain)	-5 °C
Ambient temp. max. (drag chain)	60 °C
Ambient temp. min. (fixed)	-25 °C
Ambient temp. max. (fixed)	105 °C
Ambient temp. min. (moving)	-5 °C
Ambient temp. max. (moving)	105 °C
Sealing ring material	Viton
Cable jacket material	PVC
Acceleration max. (drag chain)	5 m/s ²

Bending radius fixed cable	min. 5 x D
Bending radius repeated	min. 10 x D
Contact material	CuZn
Contact carrier material	PUR
Cover nut material	GD-Zn
Grip material	PUR
Permiss. horizon. traverse dist.	at 5 m/sec ² 5 m
Traverse speed max (drag chain)	at 5 m horiz. travel 200 m/min
Permiss. vert. traverse dist.	at 5 m/sec ² 2 m
Contact surface protection	Gold plated
Tightening torque pigtail	0.6 Nm
Design	straight
Bending cycles (in million)	> 2 Mio.
Cable diameter D	4.8 +/- 0.15 mm
System	molded
Number of sockets or pins	5
Connector style (Head I)	Plug M12

Basic data

Remarks

Enclosure type accord. to IEC 60529, when threaded together with the appropriate counterpart.
Cable structure according to UL-AWM Style 2517

Definitions see main catalog

subject to change

BCC M415-0000-1A-008-VX8434-150
Ordering code: BCC06T7

Connector

M12x1, 15m, PVC
PNP
Complementary (NO/NC)

BALLUFF
sensors worldwide

