



BCC A313-0000-10-071-VX43W6-020
Ordering code: BCC099E

7/8", 2m, PVC
No

BALLUFF

sensors worldwide

Connector

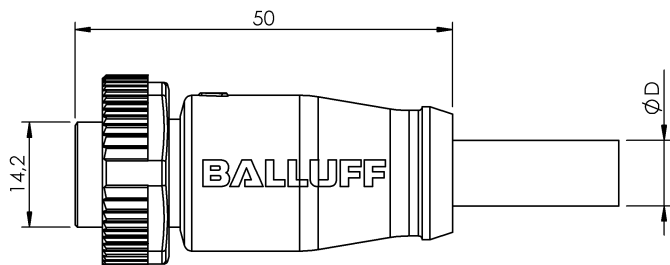

Characteristic data

Power-on indicator No
Degree of protection as per IEC 60529 IP68
Cable jacket colour yellow

Electrical data

Operating voltage UB max. AC 300 V
Operating voltage UB max. DC 300 V
Rated current (40 °C) 12.0 A

Mechanical data

Number of conductors 3
Cable length 2 m
Connector type 7/8"
Conductor cross-section AWG 16
Ambient temp. min. (fixed) -40 °C

Ambient temp. max. (fixed) 105 °C
Cable jacket material PVC
Contact material CuZn
Contact carrier material PUR
Cover nut material GD-Zn
Grip material PUR
Tightening torque pigtail 1.5 Nm
Cable diameter D 10.24 +/- 0.25 mm
System molded
Number of sockets or pins 3
Connector style (Head I) Connector 7/8"


Basic data

Remarks

Raw Cable: PVC UL-approved, 16/3 STOOW/STOOW CSA FT2 105°C 600 V

Definitions see main catalog

subject to change



BCC A313-0000-10-071-VX43W6-020
Ordering code: BCC099E

Connector

7/8", 2m, PVC
No

BALLUFF
sensors worldwide

1 _____

2 _____

3 _____