


BCC M455-0000-1A-RM020-020
Ordering code: BCC0CAE

M12x1

Connector

BALLUFF
sensors worldwide

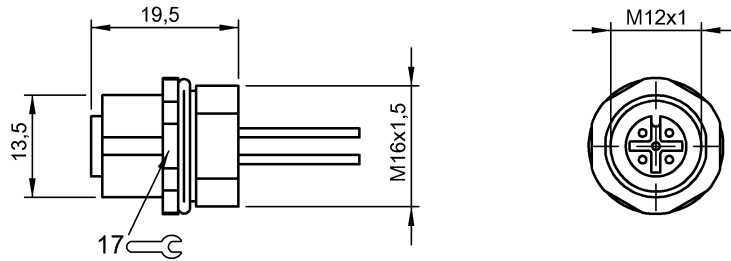

Characteristic data

Degree of protection as per IEC 60529 IP68

Electrical data

Operating voltage UB max. AC 250 V
 Operating voltage UB max. DC 250 V
 Rated current (40 °C) 4.0 A

Mechanical data

Connector type M12x1

Contact material	CuSn
Contact carrier material	PA
Number of sockets or pins	5
Connector style (Head I)	M12 flange socket


Basic data

Remarks

Enclosure type accord. to IEC 60529, when threaded together with the appropriate counterpart.

Definitions see main catalog

subject to change



- 1 _____
- 2 _____
- 3 _____
- 4 _____
- 5 _____