


**BES M12MC1-PSC10F-S04G**  
Inductive Sensors

PNP  
NO  
non flush mountable

**BALLUFF**  
sensors worldwide

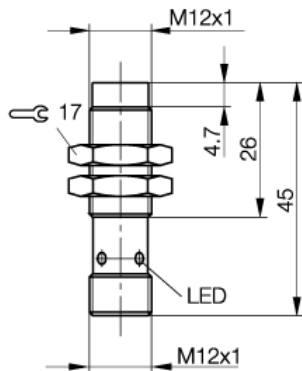

PX1486

**Electrical data:**

Connection	connector
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Electrical type	DC
Utilization category	DC 13
No-load supply current damped	= 10 mA
No-load supply current undamped	= 10 mA
Off-state current max (Ir)	100 µA
Switching output	PNP
Switching element function	NO
Operating frequency (f)	400 Hz
Voltage drop max. static	2 V
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

**Mechanical data:**

Number of Wires	3-wire
Tightening torque	10 Nm
Rated operating distance (sn)	10 mm
Diameter	M12x1 mm
Assured operating distance	0...8,1 mm
Mounting	non flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Sensing face material	PBT
Housing material	CuZn, chrome plated
Repeat accuracy max. (R)	= 5 %

**General data:**

Output indication	yes
Short circuit protected	yes
Brand	SuperG
Degree of protection IP	IP67
Protected against polarity reversal	yes
Approval	CE

**wiring**



**Pinout**



[www.balluff.com](http://www.balluff.com)

Balluff Europe: +49 7158 173 -0  
Balluff USA: 1-800-54 3-83 90  
Balluff Asia: +86 21-50 64 41 31

Online Productinformation  
2008-02-15