



## Type VW 90° (plastic thread)



IP68



-40 to 110 °C  
transient 140 °C



Mod. polyamide




V0



IP 68 to 6 bar (IP 69K)

Angled conduit fitting with plastic thread.

- Insert conduit → screw upper part tight → ready
- Reliable assembly because fitting is supplied pre-assembled.  
No additional parts required
- Resistant to vibration due to lockable cap nut
- Clamping along entire circumference ensuring maximum tear-out strength
- Inner bend without edges. This makes insertion of the cable easier.
- High sealant properties corresponding to IP 68 to 6 bar (IP 69K) without additional parts
- Simple check that the conduit is assembled correctly

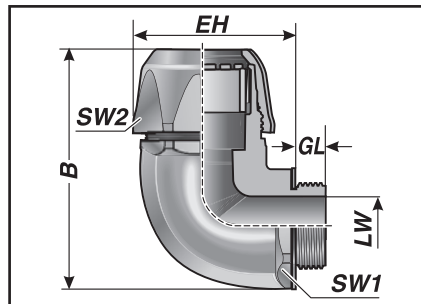

VW 90°

Type	Order no.	Colour	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	B mm	SW 1/2 mm	Pack qty.
Metric plastic thread										
VW 90 M12-K	83515052	black	M12x1.5	M12/P9	29.0	12.0	7.2	45.0	21/21	50
VW 90 M16-K	83515054	black	M16x1.5	M16/P11	35.0	12.0	10.5	55.0	27/27	50
VW 90 M20-K	83515056	black	M20x1.5	M20/P16	45.0	13.0	14.7	67.0	34/34	50
VW 90 M25-K	83515058	black	M25x1.5	M25/P21	55.0	13.0	18.7	78.0	41/41	25
VW 90 M32-K	83515060	black	M32x1.5	M32/P29	65.0	15.0	25.5	92.0	50/50	25
VW 90 M40-K **	83515062	black	M40x1.5	M40/P36	75.0	17.0	33.0	109.0	60/60	25
VW 90 M50-K	83515064	black	M50x1.5	M50/P48	93.0	17.0	42.0	134.0	75/75	10
Pg plastic thread										
VW 90 P9-K	83515452	black	Pg 9	M12/P9	29.0	12.0	7.2	45.0	21/21	50
VW 90 P11-K	83515454	black	Pg 11	M16/P11	35.0	12.0	10.5	55.0	27/27	50
VW 90 P16-K	83515456	black	Pg 16	M20/P16	45.0	13.0	14.7	67.0	34/34	50
VW 90 P21-K	83515458	black	Pg 21	M25/P21	44.0	13.0	18.7	78.0	41/41	25
VW 90 P29-K	83515460	black	Pg 29	M32/P29	65.0	14.0	25.5	92.0	50/50	25
VW 90 P36-K **	83515462	black	Pg 36	M40/P36	75.0	17.0	33.0	109.0	60/60	25
VW 90 P48-K	83515464	black	Pg 48	M50/P48	93.0	17.0	42.0	134.0	75/75	10



