


Back

### Type KW 90° (conduit fitting)

90° angled conduit fitting with plastic thread.

- Reliable assembly because fitting is supplied pre-assembled
- No additional parts required
- Integrated clamping ring ensures high tear-out strength
- High protection to IP65 without additional parts
- Can be opened without tool
- The inner bend is rounded Therefore easy insertion of the cables into the 90° angle

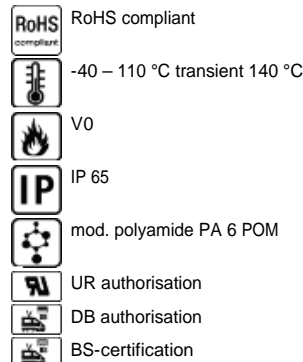

Type	Order no.	Colour	Connecting thread	Suited for Murrflex	EH mm	L mm	GL mm	LW mm	SW mm	Pack qty.
Metric version										
KW-M16x1,5/9	83565050	black	M16x1.5	M12 / P9	27.0	47.0	7.5	9.5	22.0	50
KW-M20x1,5/11	83565052	black	M20x1.5	M16 / P11	29.0	51.0	8.0	13.0	24.0	50
KW-M25x1,5/16	83565054	black	M25x1.5	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-M32x1,5/21	83565056	black	M32x1.5	M25 / P21(S)	41.0	67.0	12.0	22.0	38.0	25
KW-M40x1,5/29	83565058	black	M40x1.5	M32 / P29(S)	53.0	82.0	12.0	28.0	46.0	25
KW-M16x1,5/9	83565010	grey	M16x1.5	M12 / P9	27.0	47.0	7.5	9.5	22.0	50
KW-M20x1,5/11	83565012	grey	M20x1.5	M16 / P11	29.0	51.0	8.0	13.0	24.0	50
KW-M25x1,5/16	83565014	grey	M25x1.5	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-M32x1,5/21	83565016	grey	M32x1.5	M25 / P21(S)	41.0	67.0	12.0	22.0	38.0	25
KW-M40x1,5/29	83565018	grey	M40x1.5	M32 / P29(S)	53.0	82.0	12.0	28.0	46.0	25
Pg version										
KW-Pg 09	83561050	black	Pg 09	M12 / P9	27.0	45.0	7.5	9.5	22.0	50
KW-Pg 11	83561052	black	Pg 11	M16 / P11	29.0	51.0	8.0	13.0	24.0	50
KW-Pg 13/16	83561054	black	Pg 13.5	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-Pg 16	83561056	black	Pg 16	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-Pg 21	83561058	black	Pg 21	M25 / P21(S)	41.0	67.0	11.0	22.0	38.0	25
KW-Pg 29	83561060	black	Pg 29	M32 / P29(S)	53.0	82.0	12.0	29.0	46.0	25
KW-Pg 09	83561010	grey	Pg 09	M12 / P9	27.0	45.0	7.5	9.5	22.0	50
KW-Pg 11	83561012	grey	Pg 11	M16 / P11	29.0	51.0	8.0	13.0	24.0	50
KW-Pg 13/16	83561014	grey	Pg 13.5	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50

KW-Pg 16	83561016	grey	Pg 16	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-Pg 21	83561018	grey	Pg 21	M25 / P21(S)	41.0	67.0	11.0	22.0	38.0	25
KW-Pg 29	83561020	grey	Pg 29	M32 / P29(S)	53.0	82.0	12.0	29.0	46.0	25
NPT version										
KW-3/8"/11	83561451	black	3/8"	M16 / P11	29.0	51.0	8.0	13.0	24.0	50
KW-1/2"/16	83561450	black	1/2"	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-3/4"/21	83561452	black	3/4"	M25 / P21(S)	41.0	67.0	11.0	21.0	38.0	25
KW-1"/ 29	83561454	black	1"	M32 / P29(S)	53.0	82.0	12.0	27.0	46.0	25
KW-3/8"/11	83561411	grey	3/8"	M16 / P11	29.0	51.0	8.0	13.0	24.0	50
KW-1/2"/16	83561410	grey	1/2"	M20 / P16(S)	35.0	56.0	10.0	16.0	30.0	50
KW-3/4"/21	83561412	grey	3/4"	M25 / P21(S)	41.0	67.0	11.0	21.0	38.0	25
KW-1"/ 29	83561414	grey	1"	M32 / P29(S)	53.0	82.0	12.0	27.0	46.0	25

Dimensional drawing

