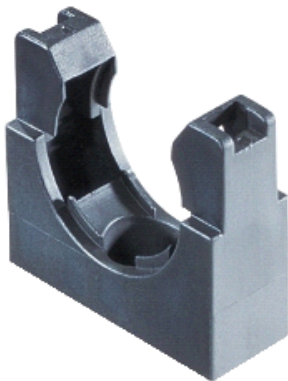












Back

Type UH

Fixing cable protection conduits to plants and machines

- Quick assembly thanks to single-hole fixing
- Simply snap in conduits
- Optimum connection of conduit to holder thanks to double webs of holder
- Optional BL bracket for applications with high stresses



	RoHS compliant
	-40 – 110 °C transient 140 °C
	V0
	Mod. polyamide PA 6
	UR authorisation
	DB authorisation
	BS-certification
	SNCF authorisation
	FAR authorisation
	ABD authorisation

Type	Order no.	Colour	Suited for Murrflex	B mm	H mm	T mm	A mm	Ø mm	Pack qty.
suitable for Murrflex EW and EWX									
UH 07	83621210	black	M10/P7	29.0	23.0	11.0	7.5	4.5	100
UH 09/M4	83621212	black	M12/P9	30.0	23.0	12.5	7.5	4.5	100
UH 09/M5	83621213	black	M12/P9	30.0	23.0	12.5	9.0	5.5	100
UH 11/M4	83621214	black	M16/P11	30.0	23.0	12.5	7.5	4.5	100
UH 11/M5	83621215	black	M16/P11	30.0	23.0	12.5	9.0	5.5	100
UH 16/M5	83621216	black	M20/P16(S)	35.0	30.0	15.0	9.5	5.5	100
UH 16/M6	83621217	black	M20/P16(S)	35.0	30.0	15.0	10.5	6.6	100
UH 21	83621218	black	M25/P21(S)	42.0	38.0	16.0	11.5	6.6	100
UH 29	83621220	black	M32/P29(S)	51.0	43.0	16.0	11.5	6.6	50
UH 36	83621222	black	M40/P36(S)	61.0	51.0	18.0	11.5	6.6	50
UH 48	83621224	black	M50/P48(S)	74.0	64.0	19.0	11.5	6.6	50
UH 07	83621110	grey	M10/P7	29.0	23.0	11.0	7.5	4.5	100
UH 09/M4	83621112	grey	M12/P9	30.0	23.0	12.5	7.5	4.5	100
UH 09/M5	83621113	grey	M12/P9	30.0	23.0	12.5	9.0	5.5	100
UH 11/M4	83621114	grey	M16/P11	30.0	23.0	12.5	7.5	4.5	100
UH 11/M5	83621115	grey	M16/P11	30.0	23.0	12.5	9.0	5.5	100
UH 16/M5	83621116	grey	M20/P16(S)	35.0	30.0	15.0	9.5	5.5	100
UH 16/M6	83621117	grey	M20/P16(S)	35.0	30.0	15.0	10.5	6.6	100
UH 21	83621118	grey	M25/P21(S)	42.0	38.0	16.0	11.5	6.6	100
UH 29	83621120	grey	M32/P29(S)	51.0	43.0	16.0	11.5	6.6	50

UH 36	83621122	grey	M40/P36(S)	61.0	51.0	18.0	11.5	6.6	50
UH 48	83621124	grey	M50/P48(S)	74.0	64.0	19.0	11.5	6.6	50

FAR / ABD authorisation for colour
grey only

Dimensional drawing

