




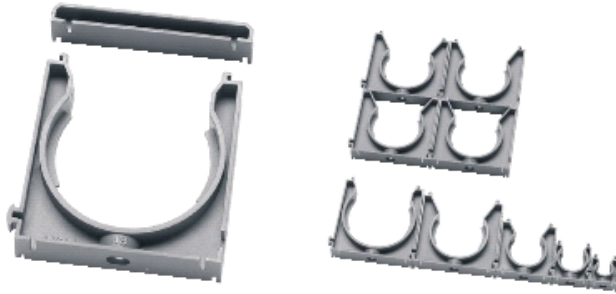





Back

### Type HS (conduit holder)

Conduit holder system made from polyamide, arrangable in rows and stacks. The holder can be screwed on directly. Optional accessories enable the bracket to be adapted to a wide variety of installation situations.

- Flexible system
- Stackable
- Can be arranged in rows
- Compatible with single holder types UH, UHF and USH



-  RoHS compliant
-  -40 – 110 °C transient 140 °C
-  V0
-  Mod. polyamide PA 6
-  DB authorisation
-  BS-certification
-  FAR authorisation
-  ABD authorisation

Type	Order no.	Colour	Suited for Murrflex	A mm	B mm	D mm	F Ø mm	G Ø mm	Pack qty.
Conduit holder									
suitable for Murrflex EW and EWX									
HS/U 07	83631052	black	M10/P07	21.5	21.0	14.0	4.5	8.0	100
HS/U 09	83631054	black	M12/P09	21.5	21.0	14.0	4.5	8.0	100
HS/U 11	83631056	black	M16/P11	28.0	29.0	14.0	5.5	10.0	100
HS/U 16	83631060	black	M20/P16	28.0	29.0	14.0	5.5	10.0	100
HS/U 21	83631062	black	M25/P21	43.0	42.4	14.0	5.5	10.0	50
HS/U 29	83631064	black	M32/P29	43.0	42.4	14.0	5.5	10.0	50
HS/U 36	83631066	black	M40/P36	63.5	57.5	14.0	5.5	10.0	50
HS/U 48	83631068	black	M50/P48	63.5	62.5	14.0	5.5	10.0	50
HS/U 07	83631012	grey	M10/P07	21.5	21.0	14.0	4.5	8.0	100
HS/U 09	83631014	grey	M12/P09	21.5	21.0	14.0	4.5	8.0	100
HS/U 11	83631016	grey	M16/P11	28.0	29.0	14.0	5.5	10.0	100
HS/U 16	83631020	grey	M20/P16	28.0	29.0	14.0	5.5	10.0	100
HS/U 21	83631022	grey	M25/P21	43.0	42.4	14.0	5.5	10.0	50
HS/U 29	83631024	grey	M32/P29	43.0	42.4	14.0	5.5	10.0	50
HS/U 36	83631026	grey	M40/P36	63.5	57.5	14.0	5.5	10.0	50
HS/U 48	83631028	grey	M50/P48	63.5	62.5	14.0	5.5	10.0	50

FAR / ABD authorisation for colour grey only

Dimensional drawing

