
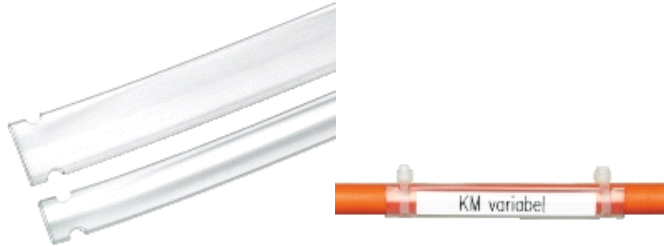







[Back](#)

**KM label holder (standard holder, variable length)** 

Individual label holder for wire, cable and conduit labels. They hold the ACS labels type KS, KSO or DM. The label holders are fixed in place with cable ties. The auxiliary tool can be used to cut the label sleeve to convenient lengths for specific purposes. The tool can process materials KM 9 and KM 15 without resetting.



-  -40 – 60 °C
-  V0
-  PVC
-  Individual lengths
-  Use in electrical systems and installations of all kinds

Type	Order no.	Length mm	for Label	Max. width of cable ties mm	Recommended min. diameter mm	Pack qty.
Single-line and multi-line						
Variable length						
KM 15/10000	86321072	10000	KS 15/x; DM 15...	5	10	1

**Polyvinyl chloride (PVC)**

Material: Polyvinyl chloride (PVC)

Soft PVC is made from polyvinyl chloride, softeners and process materials, e.g. stabilisers and lubricants. PVC is resistant to corrosive saline solutions and most acids.

Thermal stability: up to 60 °C Fire classification: V0 i.a.w. UL94

**Dimensional drawing:**



