


Back

Type SKS

High-quality, halogen-free label plates to snap into the Siemens-Sirius devices. The large printable area at the top allows room for individual project and component reference, dispensing with the need to organise additional systems.

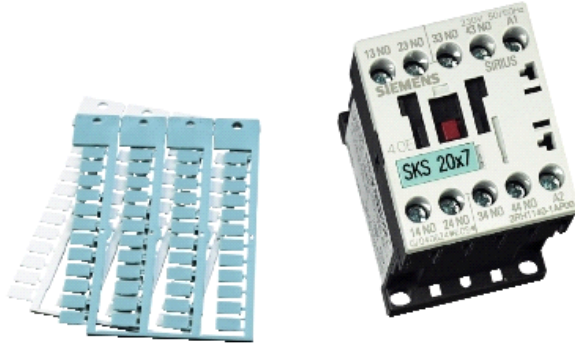

-40 – 140 °C

V0



PC



Halogen-free component labelling



For control gear

Type	Order no.	Colour	RAL equiv.	Label size mm	Printable area mm	Number symbols/line	Trees per frame	Qty. each frame	Software Type	Pack qty.
SKS/PC 20x7 Sirius	86401656	white	9016	20 x 7	20 x 7	11 / 2	4	20	95	340

PC polycarbonate

Material: Polycarbonate (PC)

Excellent surface gloss and transparency (natural), high mechanical strength and dimensional stability under heat, outstanding electrical and dielectric properties, superb dimensional accuracy and low water absorption. Impact resistance up to approx. 140 °C and, as a general rule, PC is self-extinguishing even without the addition of fire-retardants.

Thermal stability: up to 140 °C Dimensional stability: up to 1.8 N/mm 135 °C Flammability: V0 based on UL94 Halogen-free under DIN/VDE 0472, Part 815 UV-stabilised