


Back

Type KSS

High-quality, halogen-free label plates to snap into devices. The large printable area at the top allows room for individual project and component reference, dispensing with the need to organise additional systems. Adapters render the label holders usable for component location labelling. Multiframe compatible with other manufacturers.

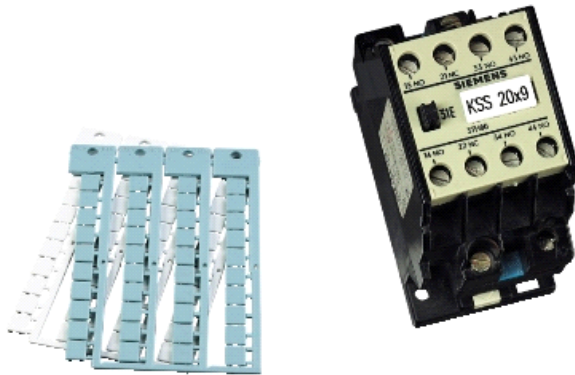

-40 – 140 °C



V0



PC



Halogen-free component labelling



For control gear

Type	Order no.	Colour	RAL equiv.	Label size mm	Printable area mm	Number symbols/line	Trees per frame	Qty. each frame	Software Type	Pack qty.
KSS 20x9 **	86421010	white	9016	20 x 9	20 x 9	11 / 2	4	20	67	380

PC polycarbonate

Material: Polycarbonate (PC)

Excellent surface gloss and transparency (natural), high mechanical strength and dimensional stability under heat, outstanding electrical and dielectric properties, superb dimensional accuracy and low water absorption. Impact resistance up to approx. 140 °C and, as a general rule, PC is self-extinguishing even without the addition of fire-retardants.

Thermal stability: up to 140 °C Dimensional stability: up to 1.8 N/mm 135 °C Flammability: V0 based on UL94 Halogen-free under DIN/VDE 0472, Part 815 UV-stabilised

