

















Cable entry plate plastic type KDP/N 24

2. generation of our cable entry plates plastic, square with improved clip-in function. Economical connection technology for tool-free wiring of equipment and machinery. Wherever the rapid and economical introduction of cables and/or pneumatic hoses in confined spaces is essential. The alternative to cable fittings. Suitable for standard cut-outs for 24-pin Harting and Wieland connectors. For snap-in fastening and/or screwing in place.

- Snap-in at plate thicknesses of 1.5 – 2.0 mm




	RoHS compliant
	Made in Germany
	-30 – 70 °C
	Enclosure: V0
	IP 65
	Enclosure: Polyamide 6.6 Seal: TPU/NBR/EPDM
	UR-Zulassung
	CSA-Zulassung
	DB-Zulassung
	SNCF-Zulassung

Type	Order no.	Colour	Openings total	Openings number / Ø	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm	Pack qty.	
KDP/N 24/11	87301110	black	11	4 / 3.0 – 6.5 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
				4 / 5.0 – 9.2 mm										
				3 / 14.0 – 20.0 mm										
KDP/N 24/12	87301120	black	12	12 / 8.0 – 12.0 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
KDP/N 24/13	87301130	black	13	2 / 3.0 – 5.5 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
				6 / 4.1 – 8.1 mm										
				4 / 9.0 – 14.0 mm										
				1 / 14.0 – 20.0 mm										
KDP/N 24/14	87301140	black	14	6 / 3.0 – 6.5 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
				4 / 5.0 – 9.2 mm										
				4 / 9.6 – 15.9 mm										
KDP/N 24/17	87301150	black	17	17 / 5.0 – 9.2 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
KDP/N 24/17-1	87301151	black	17	11 / 3.0 – 6.5 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	


1 / 4.1 –
8.1 mm


5 / 8.0 –
12.5 mm


KDP/N 24/22	87301160	black	22	16 / 3.0 – 6.5 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
-------------	----------	-------	----	----------------------	------	------	-------	-------	------	------	------	-----	---	---

4 / 5.0 –
9.2 mm

2 / 8.0 –
12.5 mm

KDP/N 24/23	87301170	black	23	23 / 4.1 – 8.1 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
-------------	----------	-------	----	----------------------	------	------	-------	-------	------	------	------	-----	---	---

KDP/N 24/29	87301180	black	29	29 / 3.0 – 6.5 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
-------------	----------	-------	----	----------------------	------	------	-------	-------	------	------	------	-----	---	---

KDP/N 24/80	87301190	black	80	78 / 1.5 – 2.6 mm	15.0	59.0	147.0	112.0	36.0	65.0	16.0	5.5	1	
-------------	----------	-------	----	----------------------	------	------	-------	-------	------	------	------	-----	---	---

2 / 2.5 –
5.0 mm


Other
variants on
request. Ask
your
Murrplastik
team.

Matching
label plate,
type KSS
20x9 or KSS
10x8 – see
catalogue
ACS.


Matching
conduit
connection,
type KDP/H...
in chapter
"Accessories
for cables
entry
systems and
plates"

The correct
tool for
completing
the cutaway
can be found
in the chapter
on "Punching
tools".


Dimensional drawing:

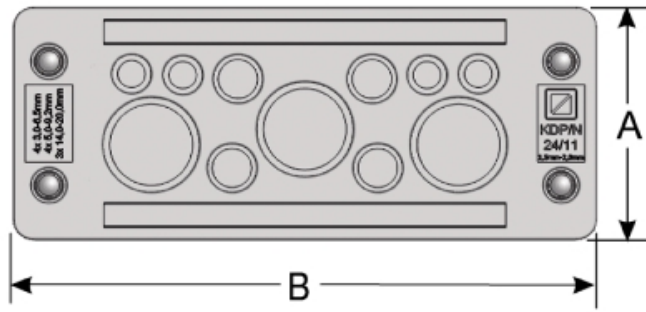


KDP/N 24/11

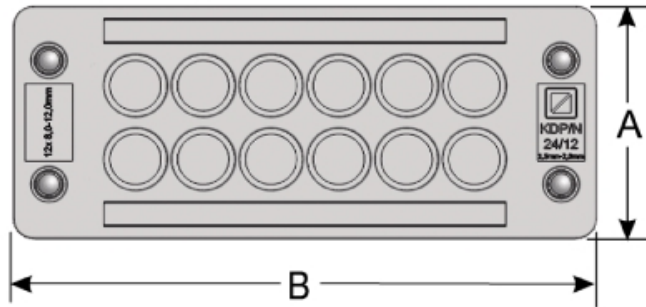


KDP/N 24/12

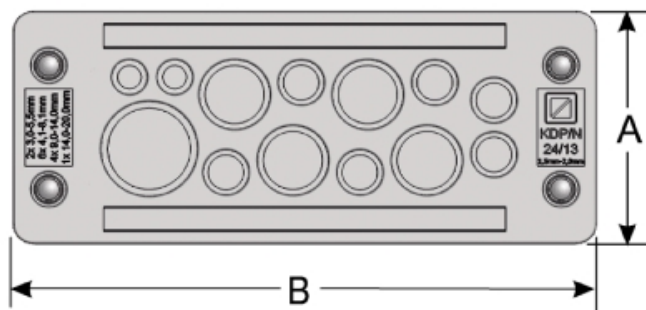


KDP/N 24/13

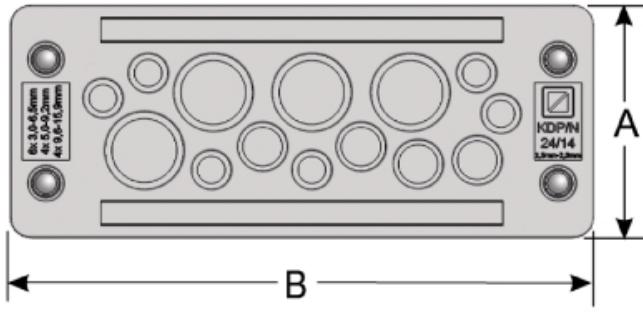


KDP/N 24/14

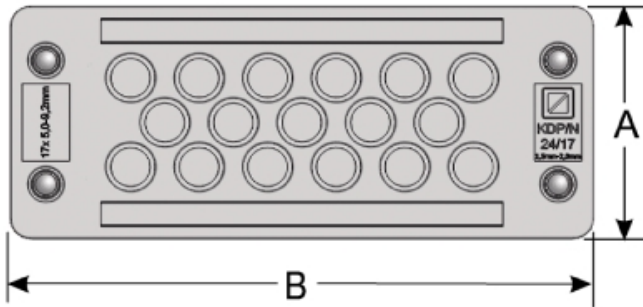


KDP/N 24/17

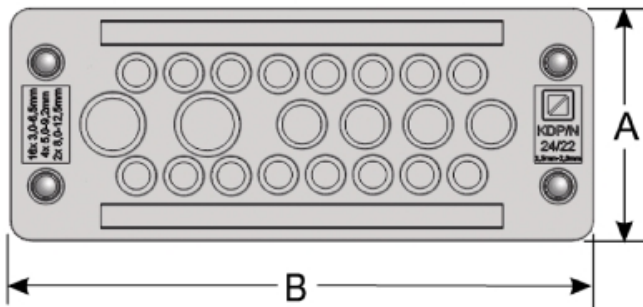


KDP/N 24/22

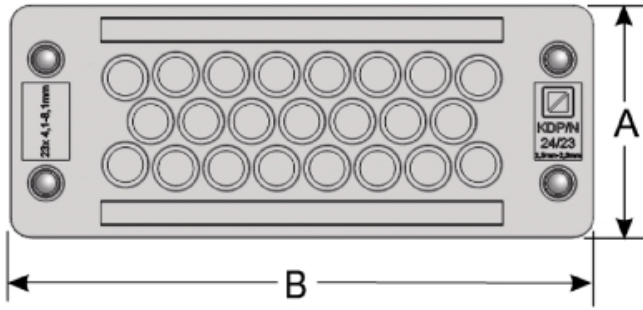


KDP/N 24/23

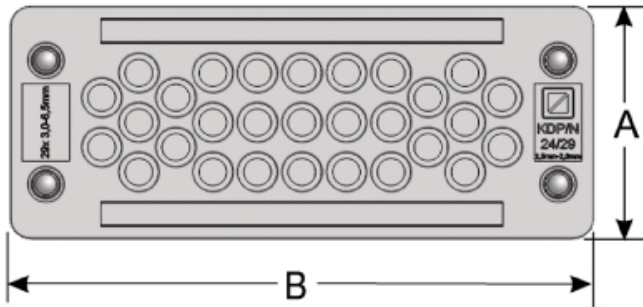

KDP/N 24/29

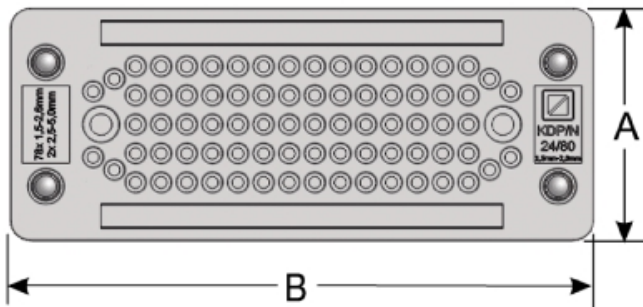

KDP/N 24/80

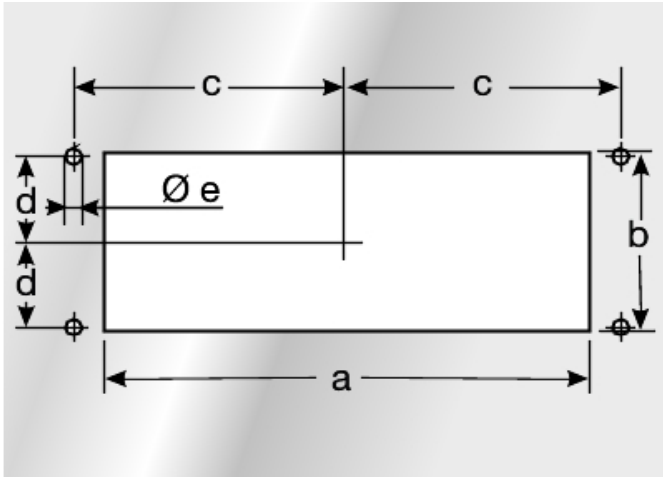

KDP/N 24/x